



Hydraulic industrial shock absorbers

Select the correct shock absorber and it will reduce shock vibration and noise. It will improve efficiency and extend machine life.

The function of shock absorber is to convert the kinetic energy of the moving object into heat and dissipate it into the atmosphere. It can stop a moving object smoothly and quietly before heavy impact occurs.

In order to save cost solid buffers such as polyurethane and rubber are often used. These cause noise and transient shock. The use of shock absorbers alleviates this resulting in both increased reliability and production. Additionally the noise reduction means they are environmentally friendly.

MDSC series: Non-adjustable shock absorbers.
Surface treatment: nickel plated: MDSC0806, MDSC1008, MDSC1210; others are black anodized.


MDFC series: Adjustable shock absorbers.

Operating principles of shock absorbers

Shock Absorber's main structure to combine with body, rod, bearing, inner tube, piston, fluid, spring. On impact the piston rod moves into the shock absorber and the hydraulic fluid is push into accumulator to produce resistant force, the pressure in the inner tube remains constant throughout the entire impact stroke. Shock Absorbers providing a linear deceleration and brings the impacting object to stop smoothly and quietly. At the end of the impact stroke, the return spring pushes the piston to its original position for next cycle

Order example


MDSC-1415-1-□-M14×1.5

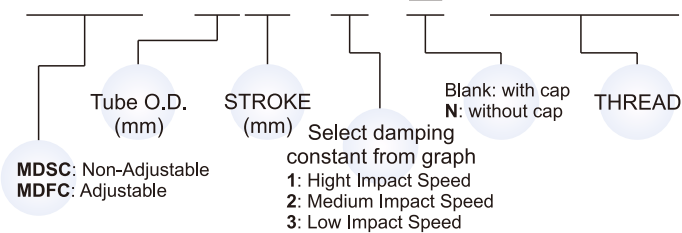


Comparison of shock absorbing of dash pots, PU rubbers, springs and shock absorbers

The springs and PU Rubbers are widespread to use in earlier period, but due to provide non-linear deceleration and to result in strong resistance, all the kinetic energy of moving objects is not absorption and produce counter pressure, this is in low efficiency.

If linear deceleration is necessary for a moving object. Mindman Shock Absorber is your best choice.




Main structures

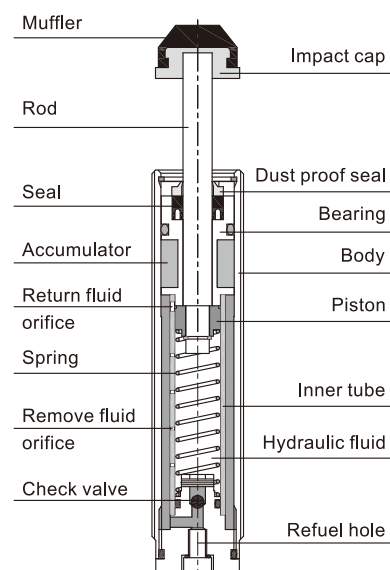

Specification

Order no.	Stroke (mm)	Max. Nm per cycle (Nm)	Effective max. weight (kg)	Max. impact speed (m/s)	Max. Nm per hour (Nm)	Operating temp. (°C)
MDSC-0806-1	6	1.8	0.9 ~ 5.6	2.0	2,400	-10~+70
MDSC-0806-2	6	1.8	2.5 ~ 10	1.2	2,400	-10~+70
MDSC-0806-3	6	1.8	5.6 ~ 22.5	0.8	2,400	-10~+70
MDSC-1008-1	8	3.2	0.9 ~ 4.4	2.6	5,760	-10~+70
MDSC-1008-2	8	3.2	2.8 ~ 10	1.5	5,760	-10~+70
MDSC-1008-3	8	3.2	10 ~ 40	0.8	5,760	-10~+70
MDSC-1210-1	10	6	1.8 ~ 12	2.6	10,800	-10~+70
MDSC-1210-2	10	6	5.3 ~ 18.7	1.5	10,800	-10~+70
MDSC-1210-3	10	6	12 ~ 75	0.8	10,800	-10~+70
MDSC-1412-1	12	16	4.7 ~ 32	2.6	28,800	-10~+70
MDSC-1412-2	12	16	14 ~ 50	1.5	28,800	-10~+70
MDSC-1412-3	12	16	56 ~ 200	0.8	28,800	-10~+70
MDSC-1415-1	15	20	5.9 ~ 27.8	2.6	36,000	-10~+70
MDSC-1415-2	15	20	17.8 ~ 62.5	1.5	36,000	-10~+70
MDSC-1415-3	15	20	62.5 ~ 250	0.8	36,000	-10~+70
MDSC-1425-1	25	28	4.6 ~ 25	3.5	58,800	-10~+70
MDSC-1425-2	25	28	14 ~ 87.5	2.0	58,800	-10~+70
MDSC-1425-3	25	28	25 ~ 350	1.5	58,800	-10~+70

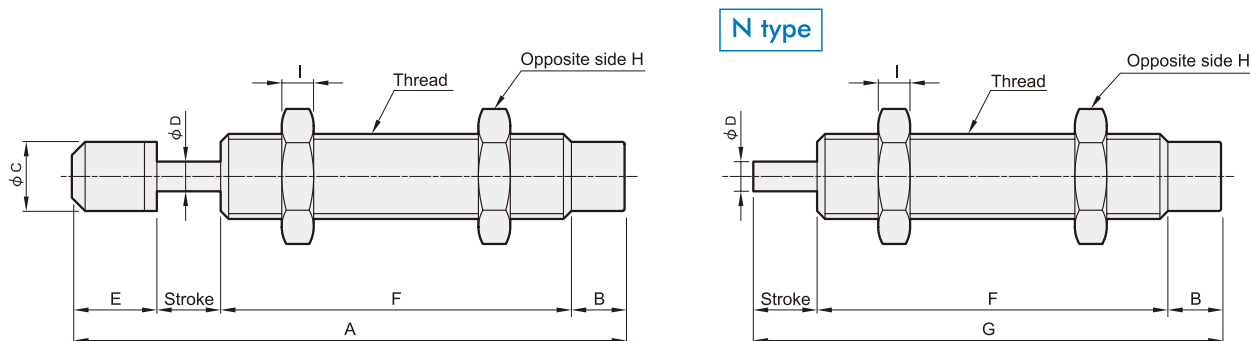


Dimensions


Order no.	Thread	Stroke (mm)	A	B	C	D	E	F	G	H	I	Weight (g)
MDSC-0806	M 8×1.0	6	53	5	6.5	2.8	8.5	33.5	—	11	3	12
MDSC-0806-N	M 8×1.0	6	—	5	—	2.8	—	33.5	44.5	11	3	11
MDSC-1008	M 10×1.0	8	62	5	8.5	3	8.5	40.5	—	12.7	3	20
MDSC-1008-N	M 10×1.0	8	—	5	—	3	—	40.5	53.5	12.7	3	19
MDSC-1210	M 12×1.0	10	72	4.5	10.5	3	9.5	48	—	14	4	36
MDSC-1210-N	M 12×1.0	10	—	4.5	—	3	—	48	62.5	14	4	34
MDSC-1412	M 14×1.5	12	92.7	8	12.2	3.5	13.4	59.3	—	19	6	66
MDSC-1412-N	M 14×1.5	12	—	8	—	3.5	—	59.3	79.3	19	6	63
MDSC-1415	M 14×1.0 / 1.5	15	103.4	8	12.2	3.5	13.4	67	—	19	6	79
MDSC-1415-N	M 14×1.0 / 1.5	15	—	8	—	3.5	—	67	90	19	6	76
MDSC-1425	M 14×1.0 / 1.5	25	133.4	8	12.2	3.5	13.4	87	—	19	6	90
MDSC-1425-N	M 14×1.0 / 1.5	25	—	8	—	3.5	—	87	120	19	6	86

Specification

Order no.	Stroke (mm)	Max. Nm per cycle (Nm)	Effective max. weight (kg)	Max. impact speed (m/s)	Max. Nm per hour (Nm)	Operating temp. (°C)
MDSC-2020-1	20	35	6.8 ~ 27	3.2	42,000	-10~+70
MDSC-2020-2	20	35	17.5 ~ 70	2.0	42,000	-10~+70
MDSC-2020-3	20	35	48.6 ~ 777	1.2	42,000	-10~+70
MDSC-2030-1	30	46	9 ~ 36	3.2	55,200	-10~+70
MDSC-2030-2	30	46	23 ~ 92	2.0	55,200	-10~+70
MDSC-2030-3	30	46	64 ~ 575	1.2	55,200	-10~+70
MDSC-2050-1	50	62	10.1 ~ 124	3.5	63,240	-10~+70
MDSC-2050-2	50	62	18.3 ~ 253	2.6	63,240	-10~+70
MDSC-2050-3	50	62	55 ~ 496	1.5	63,240	-10~+70

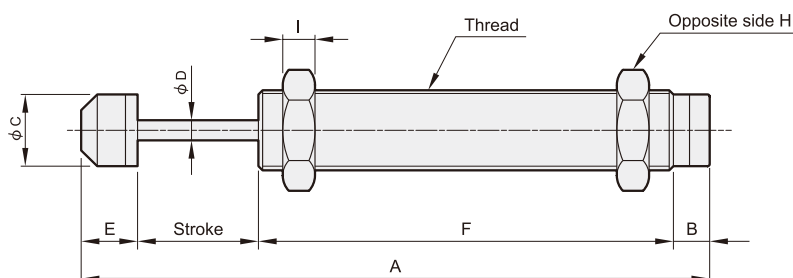

N type

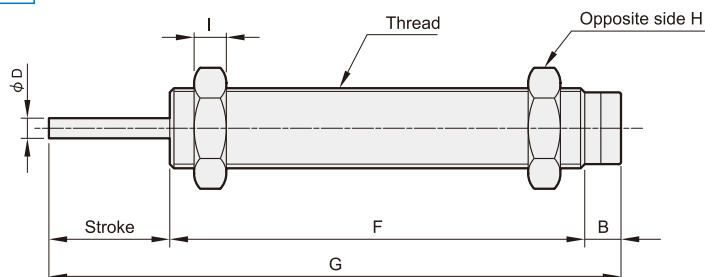


Dimensions

Order no.	Thread	Stroke (mm)	A	B	C	D	E	F	G	H	I	Weight (g)
MDSC-2020	M 20×1.5	20	130	9	17.8	5	16	85	—	26	8	200
MDSC-2020-N	M 20×1.5	20	—	9	—	5	—	85	114	26	8	196
MDSC-2030	M 20×1.5	30	158	9	17.8	5	16	103	—	26	8	221
MDSC-2050	M 20×1.5	50	222.5	9	17.8	5	16	147.5	—	26	8	293


Specification

Order no.	Stroke (mm)	Max. Nm per cycle (Nm)	Effective max. weight (kg)	Max. impact speed (m/s)	Max. Nm per hour (Nm)	Operating temp. (°C)
MDSC-2525-1	25	78	15 ~ 69	3.2	70,200	-10~+70
MDSC-2525-2	25	78	39 ~ 433	2.0	70,200	-10~+70
MDSC-2525-3	25	78	108 ~ 1733	1.2	70,200	-10~+70
MDSC-2540-1	40	122	20 ~ 108	3.5	87,840	-10~+70
MDSC-2540-2	40	122	50 ~ 381	2.2	87,840	-10~+70
MDSC-2540-3	40	122	244 ~ 1991	1.0	87,840	-10~+70
MDSC-2550-1	50	140	20 ~ 124	3.7	100,800	-10~+70
MDSC-2550-2	50	140	48 ~ 438	2.4	100,800	-10~+70
MDSC-2550-3	50	140	194 ~ 2286	1.2	100,800	-10~+70
MDSC-2580-1	80	198	24.7 ~ 99	4	118,800	-10~+70
MDSC-2580-2	80	198	44 ~ 396	3.0	118,800	-10~+70
MDSC-2580-3	80	198	176 ~ 1584	1.5	118,800	-10~+70
MDSC-2725-1	25	78	15 ~ 69	3.2	70,200	-10~+70
MDSC-2725-2	25	78	39 ~ 433	2.0	70,200	-10~+70
MDSC-2725-3	25	78	108 ~ 1733	1.2	70,200	-10~+70
MDSC-3660-1	60	260	57 ~ 231	3.0	124,800	-10~+70
MDSC-3660-2	60	260	130 ~ 813	2.0	124,800	-10~+70
MDSC-3660-3	60	260	520 ~ 3250	1.0	124,800	-10~+70


MDSC-2525
MDSC-2550
MDSC-2725

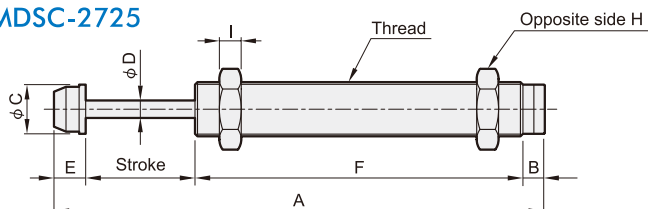


MDSC-2540
MDSC-3660

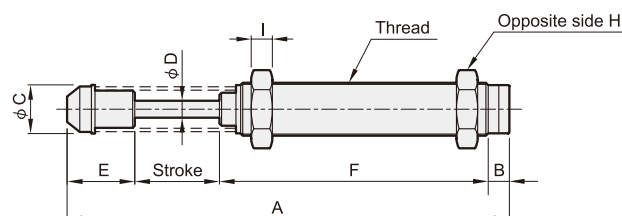

N type

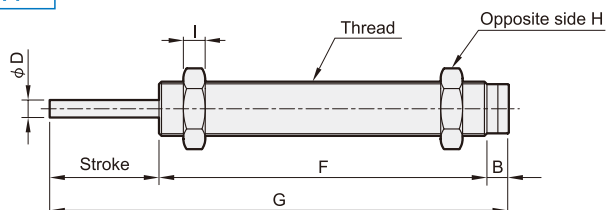

MDSC-2580

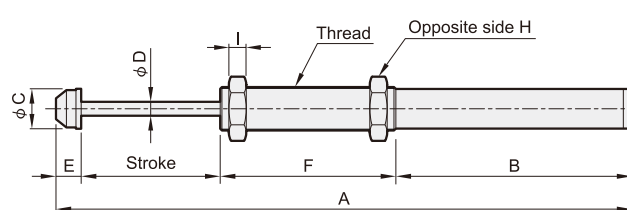


Dimensions


Order no.	Thread	Stroke (mm)	A	B	C	D	E	F	G	H	I	Weight (g)
MDSC-2525	M 25×1.5 / 2.0	25	152.6	10	23	8	16.6	101	—	32	10	341
MDSC-2525-N	M 25×1.5 / 2.0	25	—	10	—	8	—	101	136	32	10	336
MDSC-2540	M 25×1.5 / 2.0	40	211	10	23	8	34	127	—	32	10	430
MDSC-2550	M 25×1.5 / 2.0	50	226.6	10	23	8	16.6	150	—	32	10	430
MDSC-2580	M 25×1.5 / 2.0	80	333.6	137	23	8	16.6	100	—	32	10	578
MDSC-2725	M 27×3.0 / 1.5	25	152.6	10	23	8	14.5	101	—	32	10	335
MDSC-2725-N	M 27×3.0 / 1.5	25	—	10	—	8	—	101	136	32	10	330
MDSC-3660	M 36×1.5	60	247	11	36	10	22.5	153.5	—	46	15	1074

Specification

Order no.	Stroke (mm)	Max. Nm per cycle (Nm)	Effective max. weight (kg)	Max. impact speed (m/s)	Max. Nm per hour (Nm)	Operating temp. (°C)
MDFC-1410	10	15	2.9 ~ 120	3.2	27,000	-10~+70
MDFC-2016	16	28	5.4 ~ 224	3.2	33,600	-10~+70
MDFC-2020	20	35	6.8 ~ 280	3.2	42,000	-10~+70
MDFC-2525	25	78	15 ~ 624	3.2	70,200	-10~+70
MDFC-2550	50	140	27 ~ 1,120	3.2	100,800	-10~+70
MDFC-2725	25	78	15 ~ 624	3.2	70,200	-10~+70

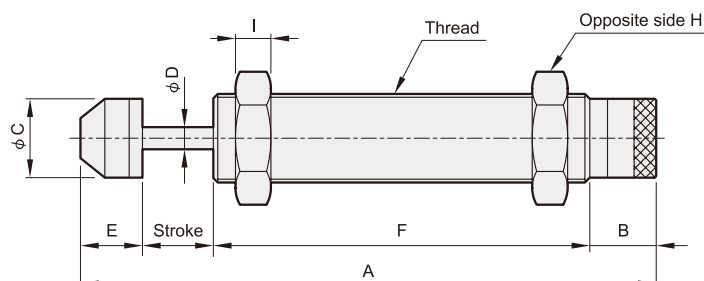

N type

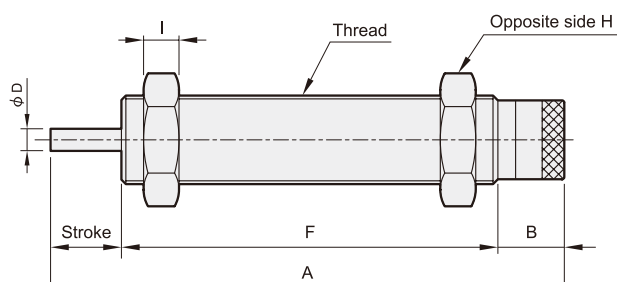


Dimensions

Order no.	Thread	Stroke (mm)	A	B	C	D	E	F	H	I	Weight (g)
MDFC-1410	M 14 × 1.0 / 1.5	10	101.9	11.5	12.2	3.5	13.4	67	19	6	81
MDFC-1410-N	M 14 × 1.0 / 1.5	10	88.5	11.5	—	3.5	—	67	19	6	78
MDFC-2016	M 20 × 1.5	16	132	15	17.8	5	16	85	26	8	218
MDFC-2016-N	M 20 × 1.5	16	116	15	—	5	—	85	26	8	214
MDFC-2020	M 20 × 1.5	20	136	15	17.8	5	16	85	26	8	219
MDFC-2020-N	M 20 × 1.5	20	120	15	—	5	—	85	26	8	215
MDFC-2525	M 25 × 1.5 / 2.0	25	158.1	15.5	23	8	16.6	101	32	10	361
MDFC-2525-N	M 25 × 1.5 / 2.0	25	141.5	15.5	—	8	—	101	32	10	356
MDFC-2550	M 25 × 1.5 / 2.0	50	232.1	15.5	23	8	16.6	150	32	10	470
MDFC-2725	M 27 × 1.5 / 3.0	25	158.1	15.5	23	8	16.6	101	32	6.5	355
MDFC-2725-N	M 27 × 1.5 / 3.0	25	141.5	15.5	—	8	—	101	32	6.5	350


Specification

Order no.	Stroke (mm)	Max. Nm per cycle (Nm)	Effective max. weight (kg)	Max. impact speed (m/s)	Max. Nm per hour (Nm)	Operating temp. (°C)
MDFC-2540	40	122	23.8 ~ 976	3.2	87,840	-10~+70
MDFC-3625	25	110	21 ~ 880	3.2	52,800	-10~+70
MDFC-3650	50	220	43 ~ 1,760	3.2	105,600	-10~+70

MDFC-2540

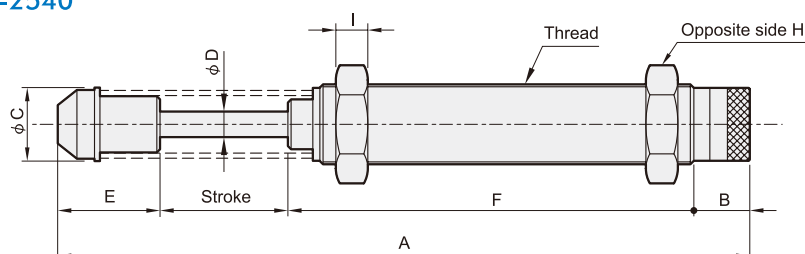


MDFC-3625 MDFC-3650

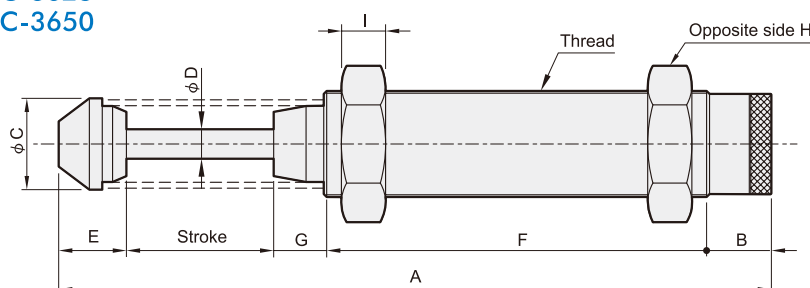

Dimensions

Order no.	Thread	Stroke (mm)	A	B	C	D	E	F	G	H	I	Weight (g)
MDFC-2540	M 25 × 1.5 / 2.0	40	216.5	15.5	23	8	34	127	—	32	10	460
MDFC-3625	M 36 × 1.5	25	186	18	36	10	22.5	106.5	14	46	15	974
MDFC-3650	M 36 × 1.5	50	248	18	36	10	22.5	138	19.5	46	15	1144

Installation of stop collar and nut

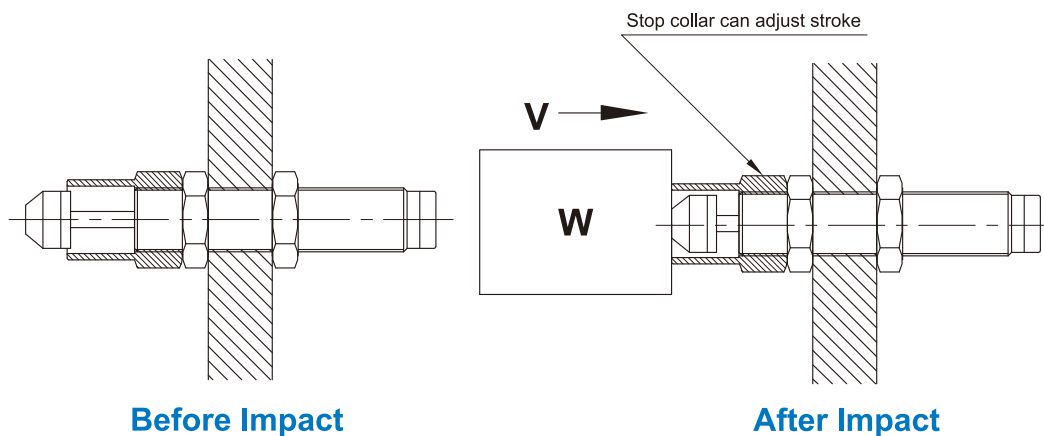

Accessories

STC-08 Match: MDSC-0806	STC-20 Match: MDSC-2020 MDSC-2050 MDFC-2016 MDFC-2020
STC-10 Match: MDSC-1008	STC-25 Match: MDSC-2525 MDFC-2525
STC-12 Match: MDSC-1210	STC-25L Match: MDSC-2540 MDSC-2550 MDSC-2580 MDFC-2540 MDFC-2550
STC-14 Match: MDSC-1412 MDSC-1415 MDFC-1410	STC-36 Match: MDSC-3660 MDFC-3625 MDFC-3650