


### Specification

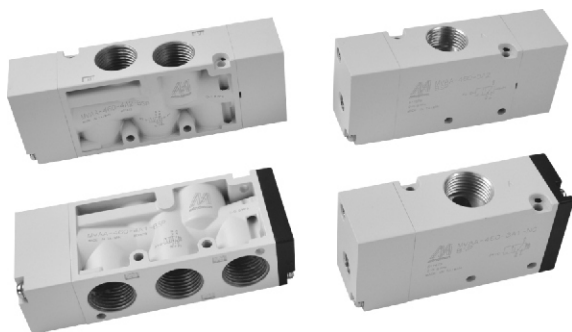

Model	MVAA-460-3A1,A2	MVAA-460-4A1,A2	
Bore No.	15A		
Port size	G1/2		
No. of port	3	5	
Medium	Air		
Operating pressure range	0.15~0.8 MPa		
Proof pressure	1 MPa		
Effective orifice	50 mm <sup>2</sup>		
Pilot pressure range	(0.34 × P* + 0.1)~0.8 MPa		
Ambient temperature	-5~+60°C (No freezing)		
Weight	300 g	326 g	275 g 338 g

※ P: Operating pressure.

### Order example

MVAA - 460 - 4A2 - NC - NPT

MODEL

BODY WIDTH


3: 3way  
4: 4way

A1: Single pilot  
A2: Double pilot

NC: Normally closed  
NO: Normally open  
(Only for 3A1 type)

PORT THREAD  
Blank: G thread  
Rc: Rc thread  
NPT: NPT thread





### Flow features

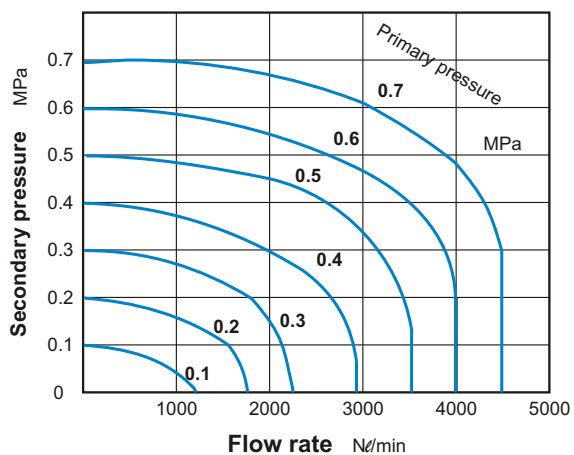





# MVAA-460 Dimensions

## PILOT VALVE

**MVAA-460-4A1**


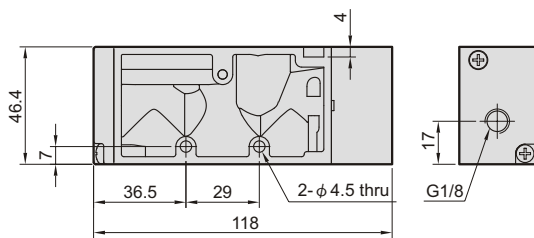
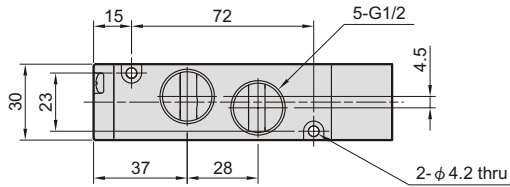



**MVAA-460-4A2**

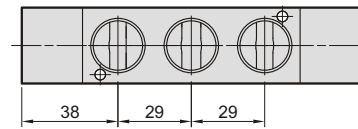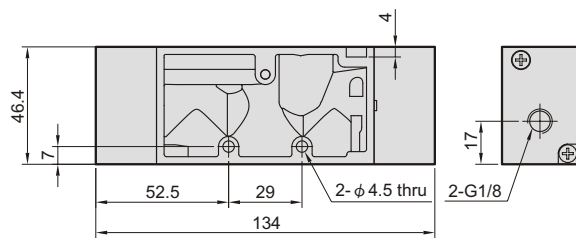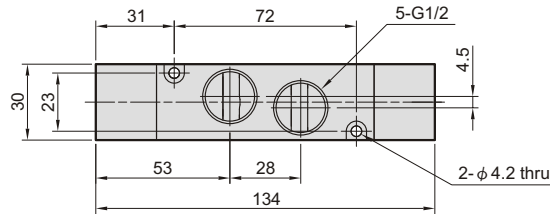


**MVAA-460-3A1-NC/NO**

**NC**

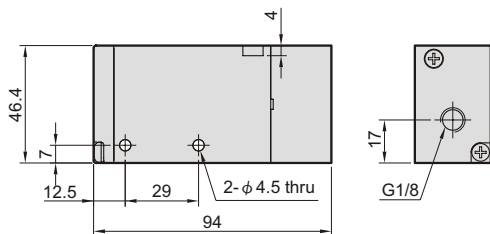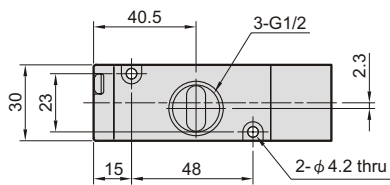

**MVAA-460-3A2**



**NO**

